



VZ-156PM-12G is a 15" 4K monitor with 12G-SDI interface - 2x3G-SDI & 2x12G-SDI. VZ-156PM-12G supports various video formats including 12G-SFP, 12G/6G/3G/HD-SDI and HDMI 2.0. VZ-156PM-12G provides wide color gamut up to DCI and a full feature set. It can support up to 4096x2160 (60,50,30,25 & 24p) and 3840x2160 (60,50,30,25 & 24p) signal.

VZ-156PM-12G ADVANTAGES

- All SDI signals Input - 12G-SDI / 6G-SDI / 3G-SDI (Level A, DL-B, DS-B) / HD-SDI/SD-SDI
- Quad SDI / Dual SDI / Single SDI
- ST2084 / HLG
- Time Code (LTC / VITC)
- Tally (Red / Green / Yellow)
- False Color / Color Temperature / Color Space
- Audio Level Meter (16ch)



When HDR is activated, the display reproduces a greater dynamic range of luminosity, allowing lighter and darker details to be displayed more clearly. Effectively enhancing the overall picture quality. Support ST2084 300/1000/10000 and HLG



3D-LUT is a table for quickly looking up & output specific color data. By leading different 3D-LUT tables, it can quickly recombine color tone to form different color styles. Built-in 3D-LUT, featuring 8 default logs & 6 user logs. Supports leading the .cube file via USB flash disk.



12-Gb/s (12G)-SDI, Automatically adapts to SMPTE and ITU digital video standards for 12G-SDI, 6G-SDI, 3G-SDI (Level A, DL-B, DS-B), HD-SDI and SD-SDI. Quad link accepts square division and 2 sample interleave



Support 12G-SFP optical connector input (Optical module is option)




Color Temp - 9300°K, 7500°K, 6500°K, 5500°K, 3500°K and built-in user mode




Monitor can be remotely controlled via LAN, GPI or RS422


12G-SDI Single Link

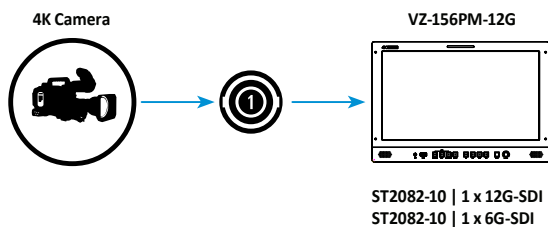

12G-SDI Dual Link

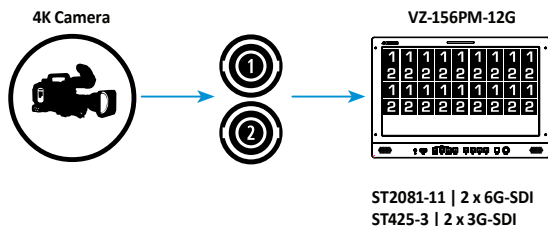

12G-SDI Quad Link

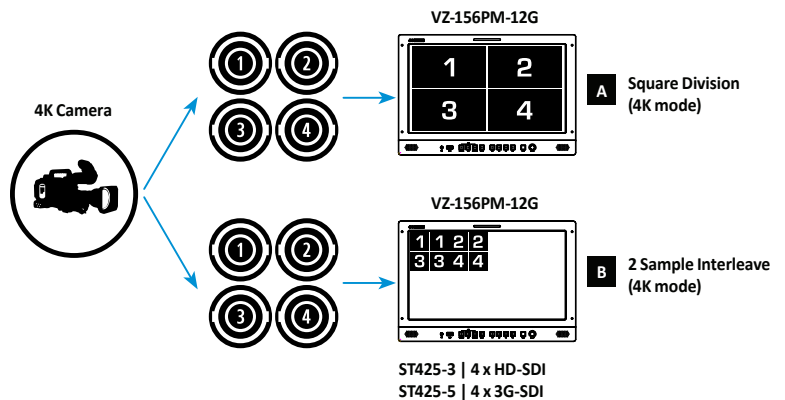

* Design and specifications are subject to change without notice.




MODEL #		VZ-156PM-12G	
DISPLAY			
Screen Size	15.6"		
Max. Resolution	3840 x 2160 (4K) IPS pixel		
Pixel Pitch	0.08970 mm x 0.08970 mm		
Brightness	330 cd/m ² (Typical)		
Contrast Ratio	1000 : 1		
Aspect Ratio	16 : 9		
Viewing Angle (H/V)	176° / 176°		
Color Depth	16.7 M		
HDR	ST2084 300/1000/10000/HLG		
Supported Log Formats	SLog2 / SLog3 / CLog / NLog / ArriLog / JLog or User		
LUT (Look Up Table)	Support (3D LUT - .cube Format)		
Technology	Calibration to Rec.709 with Optional Calibration Unit		
INTERFACE			
12G SDI In / Out	2 / 2 (Loophthrough)		
3G SDI In / Out	2 / 2 (Loophthrough)		
HDMI 2.0 In / Out	1 / 1		
SFP In	1 x 12G SFP+ (Fiber Module for Option)		
RJ45 In	1		
RS422 In / Out	1 / 1 (Remote Control)		
GPI In	1 (Remote Control)		
USB	1 (Remote Control)		
Input Format			
SDI	12G-SDI	(4:2:2)	3840x2160/4096x2160 (47.95/48/50/59.94/60p)
		(4:4:4)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
	DL 6G	(4:2:2)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
		(4:4:4)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
	6G-SDI	(4:2:2)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
		(4:4:4)	1920p/2048x1080 (47.95/48/50/59.94/60p)
	2SI-3G	(4:2:2)	3840x2160/4096x2160 (47.95/48/50/59.94/60p)
		(4:4:4)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
	SQ-HD,2SI DL-3G, SQ DL-3G	(4:2:2)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
		(4:4:4)	3840x2160/4096x2160 (47.95/48/50/59.94/60p)
	SQ-3G	(4:2:2)	3840x2160/4096x2160 (47.95/48/50/59.94/60p)
		(4:4:4)	3840x2160/4096x2160 (23.98/24/25/29.97/30p)
	DL 3GSDI-Level B	(4:2:2)	1080p / 2048x1080 (47.95p/48p/50p/59.94p/60p)
		(4:4:4)	720p(23.98/24/25/29.97/30/50/59.94/60p) 1080p (23.98p/23.98sf/24p/24sf/25p/25sf/29.97p/29.97sf/30p/30sf/50i/59.94i/60i)
	3GSDI-Level A	(4:2:2)	1080p / 2048x1080 (47.95p/48p/50p/59.94p/60p)
		(4:4:4)	1080p / 2048x1080 (23.98p/23.98sf/24p/24sf/25p/25sf/29.97p/29.97sf/30p/30sf)
			720p(23.98p/24p/25p/29.97p/30p/50p/59.94p/60p)
			2048x1080/1080P/720P
	HD		
	SD		525i/625i

AUDIO		
Built in speaker	1W x 2	
SDI	16ch 48kHz 24 bit	
HDMI	8ch 24 bit	
Ear Jack	3.5 mm	
DIMENSIONS & WEIGHT		
Outline Dimension	(W x H x D) (inch)	15.47 x 10.51 x 2.42"
	(W x H x D) (mm)	393 x 267 x 61.5 mm
Net Weight	6.39 lbs (3.4 kg)	
GENERAL		
Power	Electrical Ratings	XLR-4p (DC 12~24V)
	Consumption	≤ 32.5 W
Warranty	2 Years	
Operating Temperature	32 - 104°F / 0 - 40°C	
Humidity at High Operating Temperature	90% RH for 240 hrs, TA=+ 140°F (60°C)	
Storage Temperature	-4 - 140°F / -20 - 60°C	
Battery Plate	V-mount / Anton Bauer mount	
Package Include	15V DC Adapter x 1, Manual x 1, VESA Plate x1, Carrying Case x 1, Acrylic Screen Protector x1, Desktop Stand Set x 1, Gimbal Bracket x1, USB Disk x1, Battery Plate (V-Mount) x 1 (Option)	


Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714)996-1177, Fax : (714)996-1138
- Sales : sales@viewzusa.com

DIMENSIONS

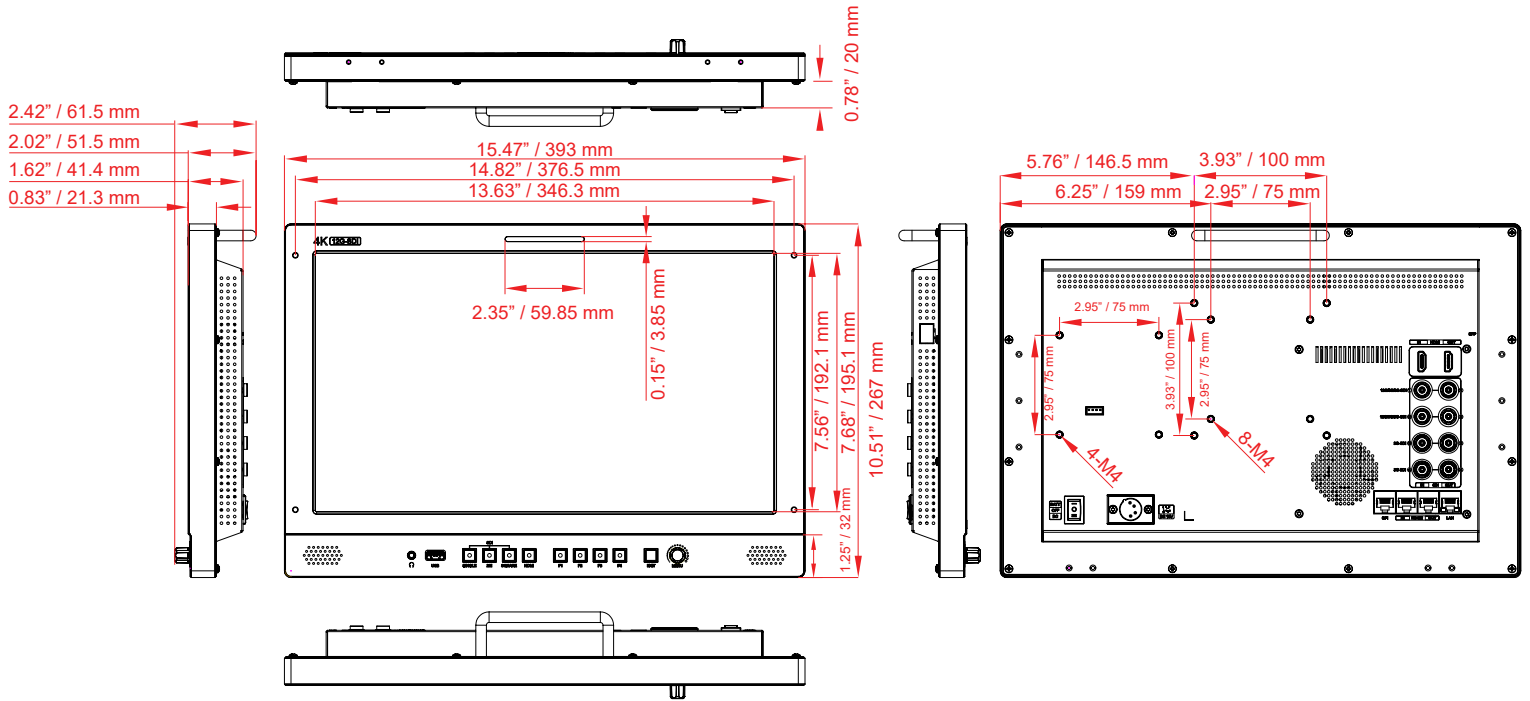

INTERFACE

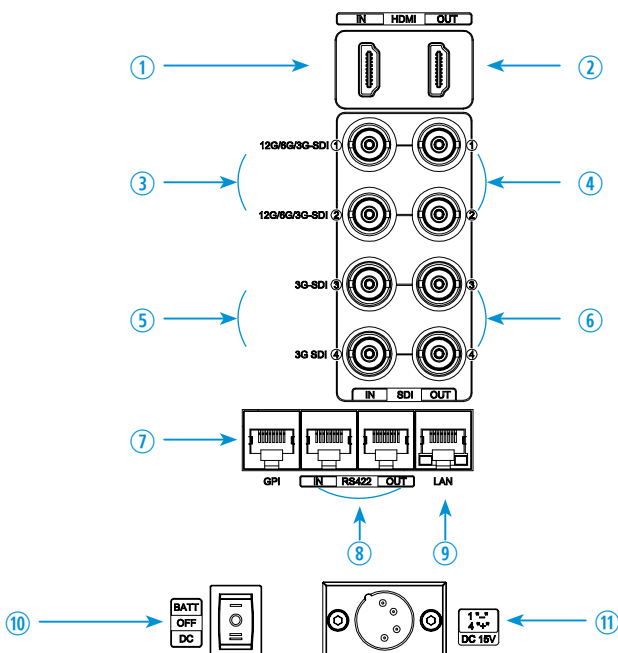

1. HDMI In
2. HDMI Out
3. 12G-SDI In
4. 12G-SDI Out
5. 3G-SDI In
6. 3G-SDI Out
7. GPI In
8. RS 422 In / Out
9. TALLY
10. On-Off Switch
11. DC XLR 12-24V In

Contact ViewZ

- Address : 177 W. Orangethorpe Ave., Placentia, CA 92870
- Phone : (714)996-1177, Fax : (714)996-1138
- Sales : sales@viewzusa.com